

Fig. 1a

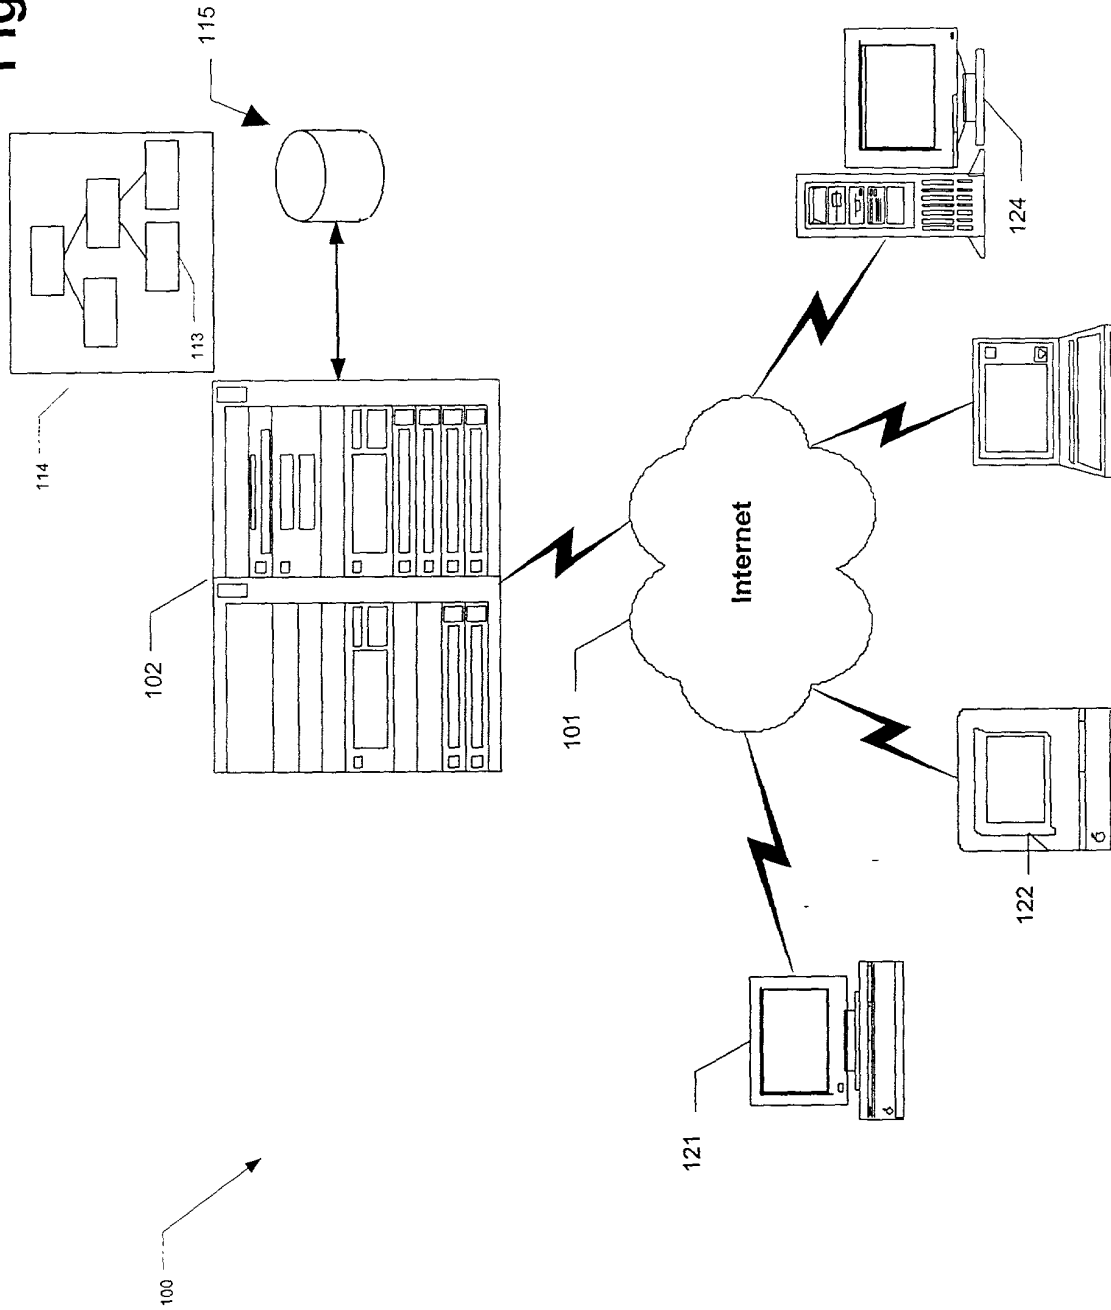
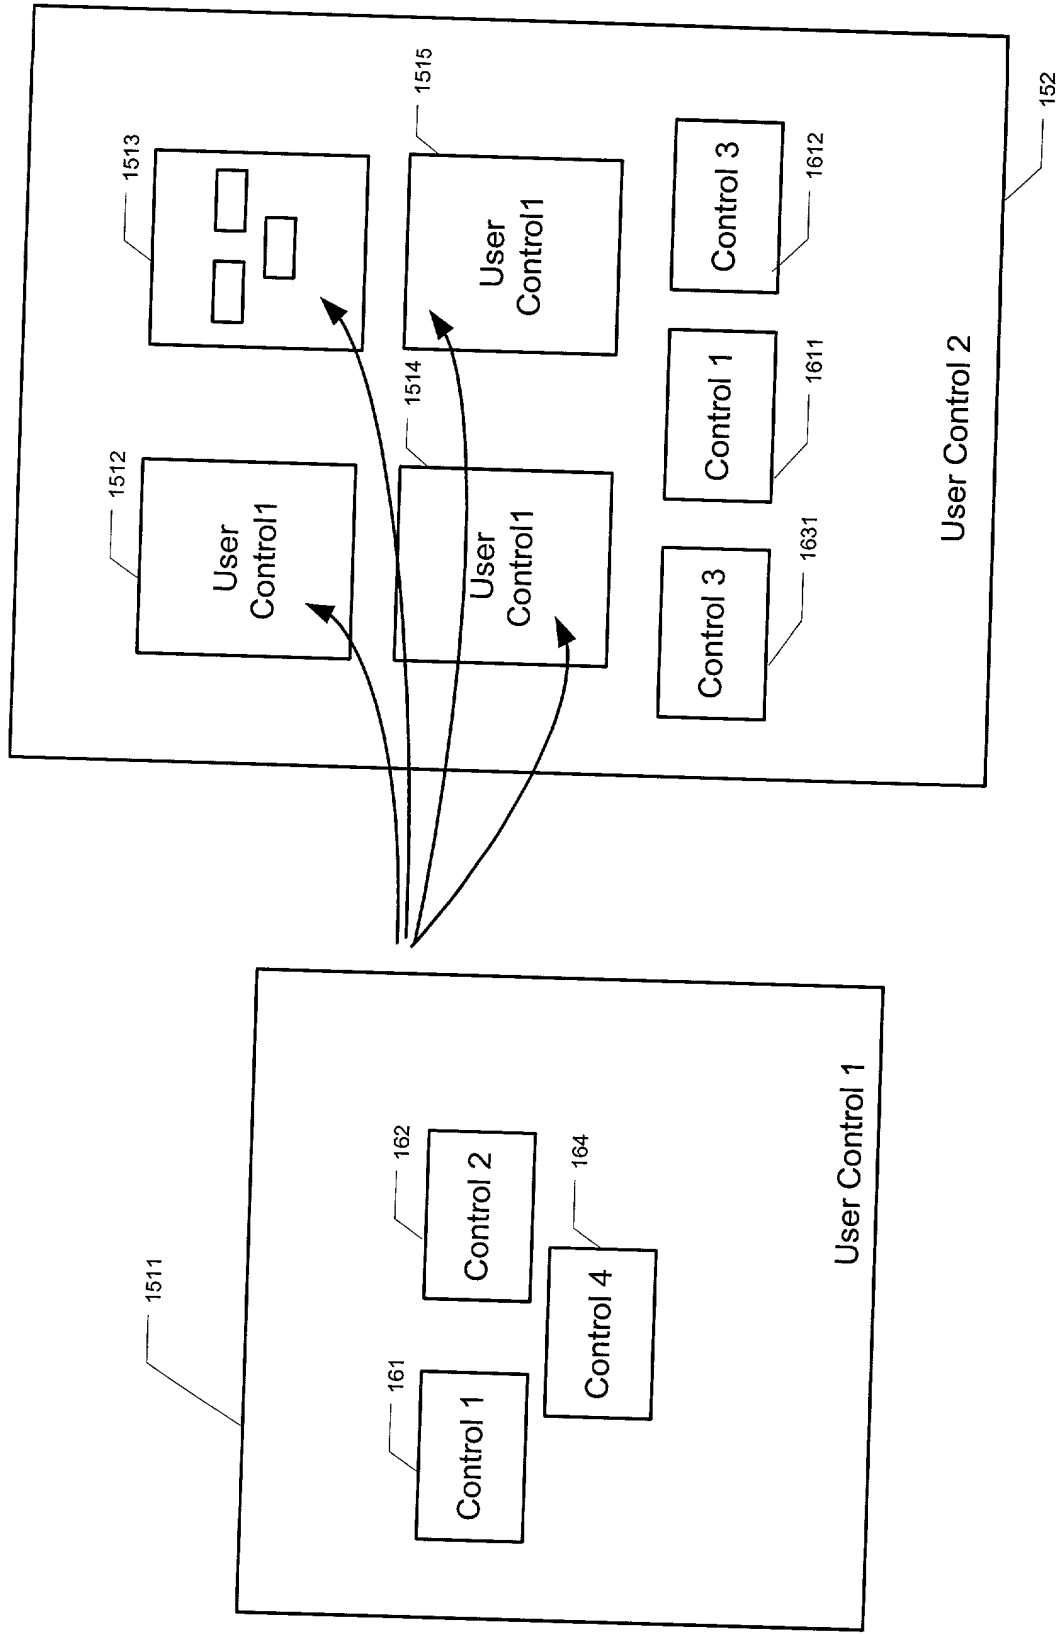


Fig. 1b



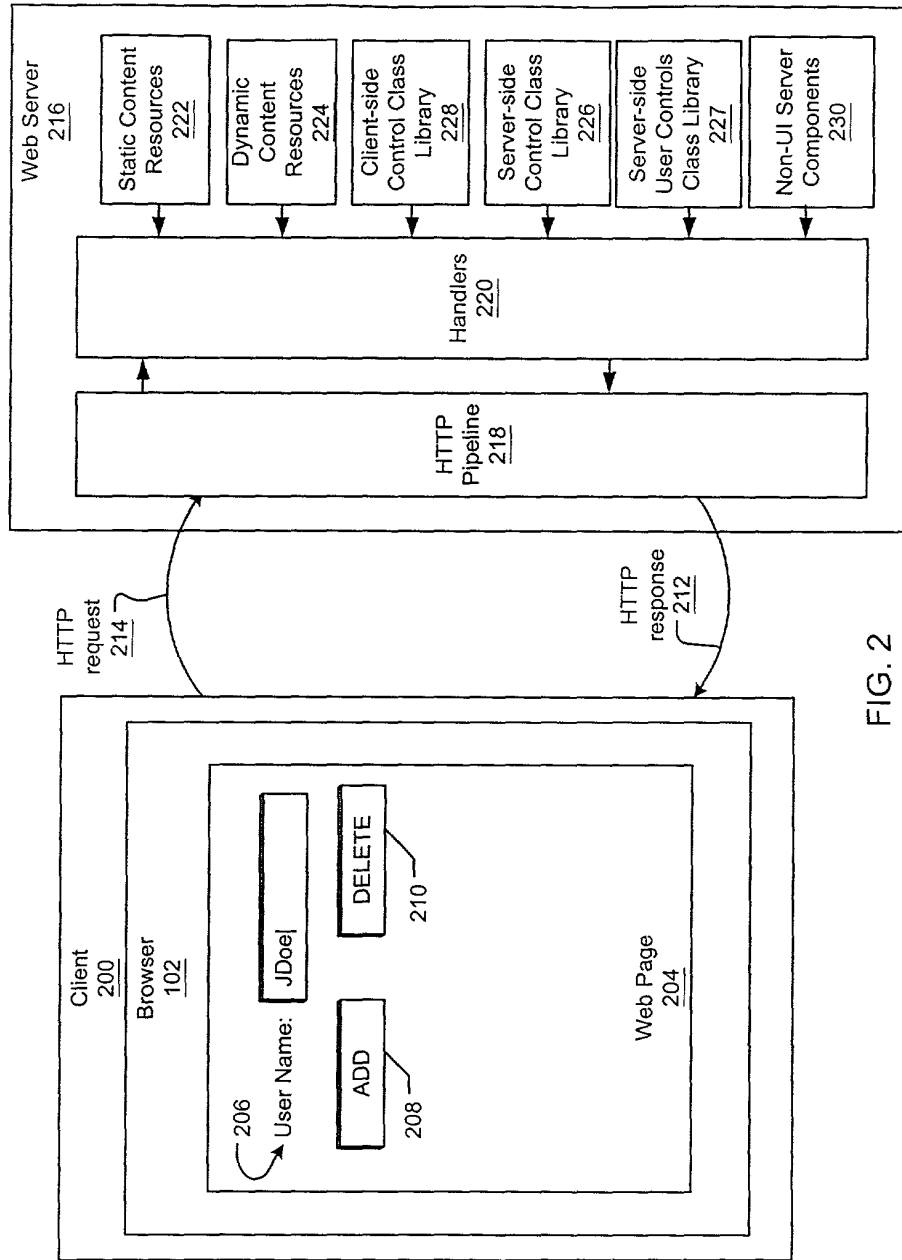


FIG. 2

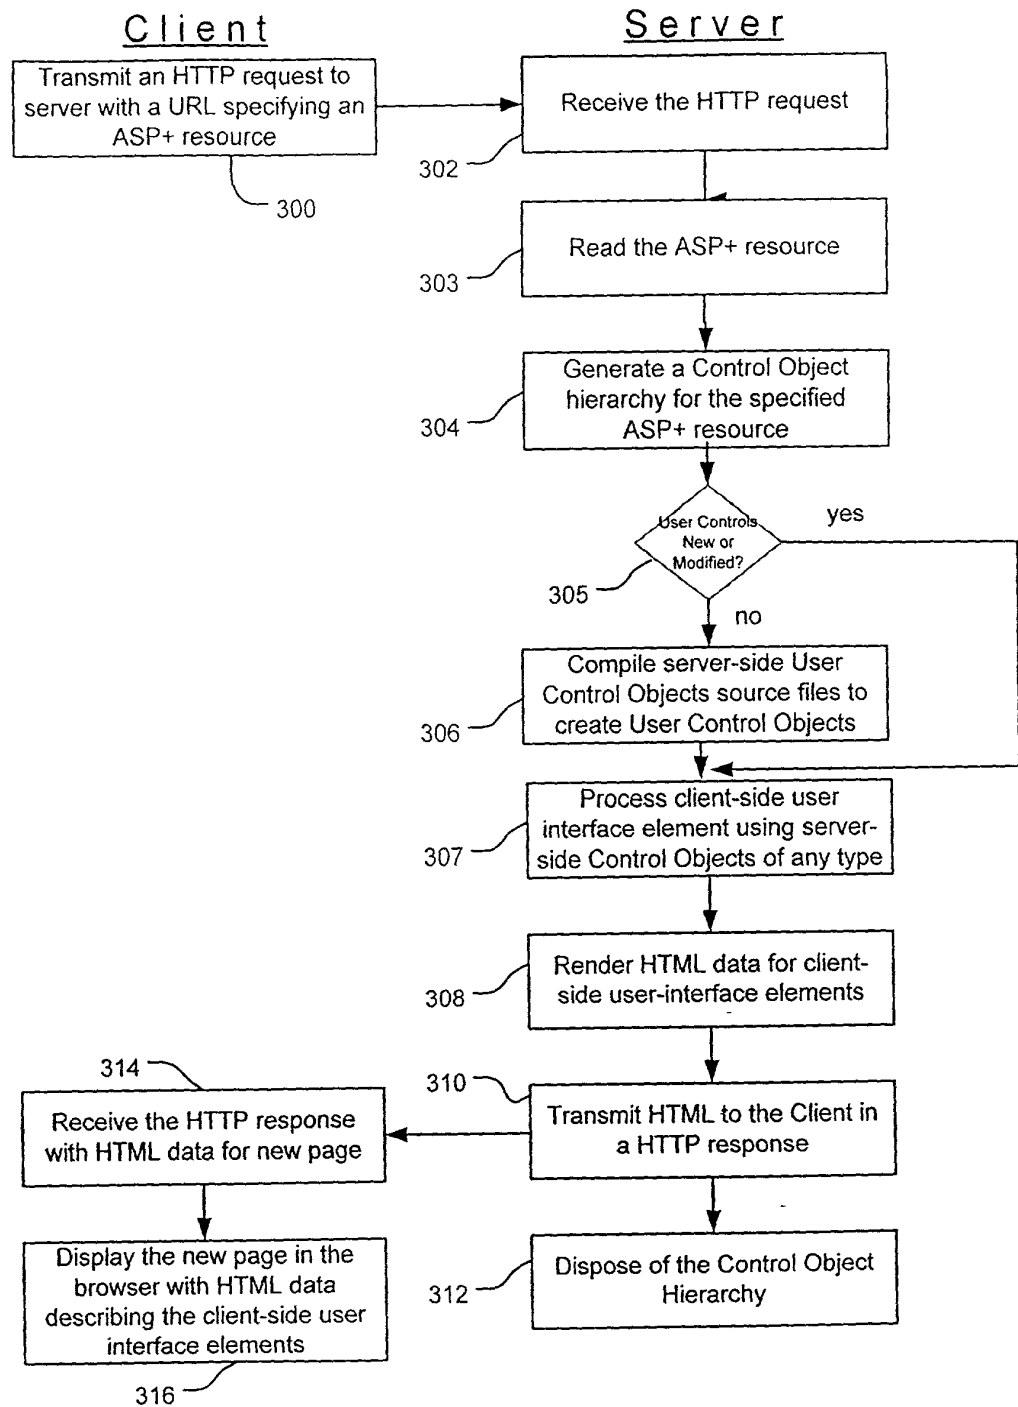


FIG. 3

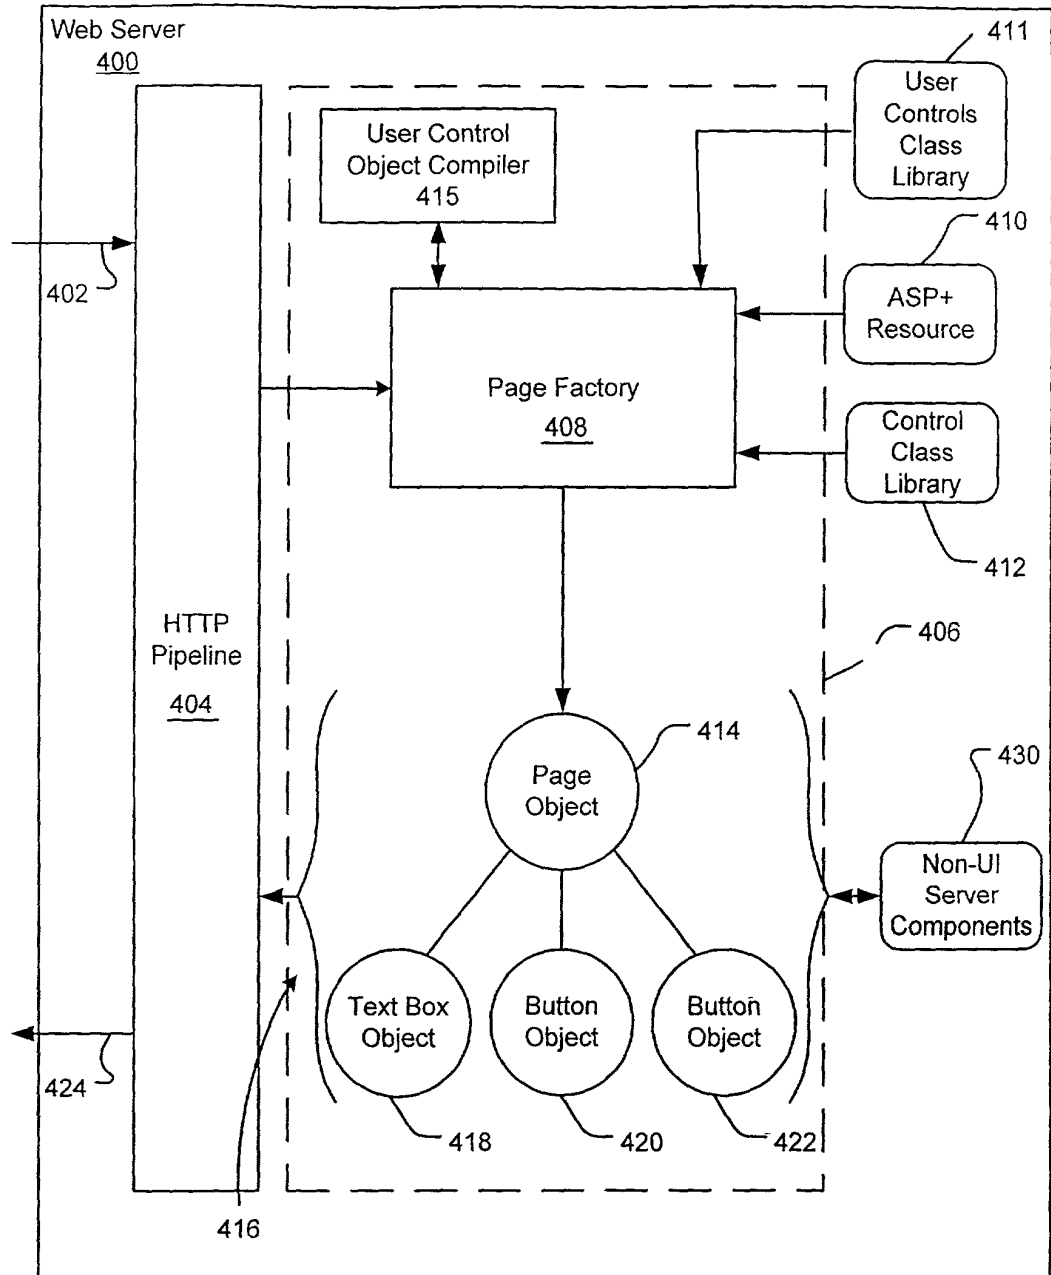


FIG. 4

```
500 Testpage.aspx
1  <%@ Page Description="A Sample Page Consuming a User Control" %>
2  <%@ Register TagPrefix="merchant" TagName="datagrid" Src="MySimpleControl.ascx" %>
3  <html>
4    <script language="VB" runat=server>
5      sub Page_Load(Sender as Object, E as EventArgs)
6        MySimpleControl.CustomerState = "CA"
7      end sub
8    </script>
9
10   <body>
11     <h1> Merchant Page Title</h1>
12     <merchant:datagrid id="MySimpleControl" runat=server/>
13
14   </body>
15 </html>

```

```
510 MySimpleControl.ascx
1  <html>
2    <script language="VB" runat=server>
3      Public CustomerState = string
4      sub Page_Load(Sender as Object, E as EventArgs)
5        MyList.Data = SQL_Call("Select * from Authors = " & CustomerState)
6      end sub
7    </script>
8
9    <body>
10     <h1> Merchant Page Title</h1>
11     <asp:datagrid id="MyList" runat=server/>
12   </body>
13 </html>

```

FIG. 5

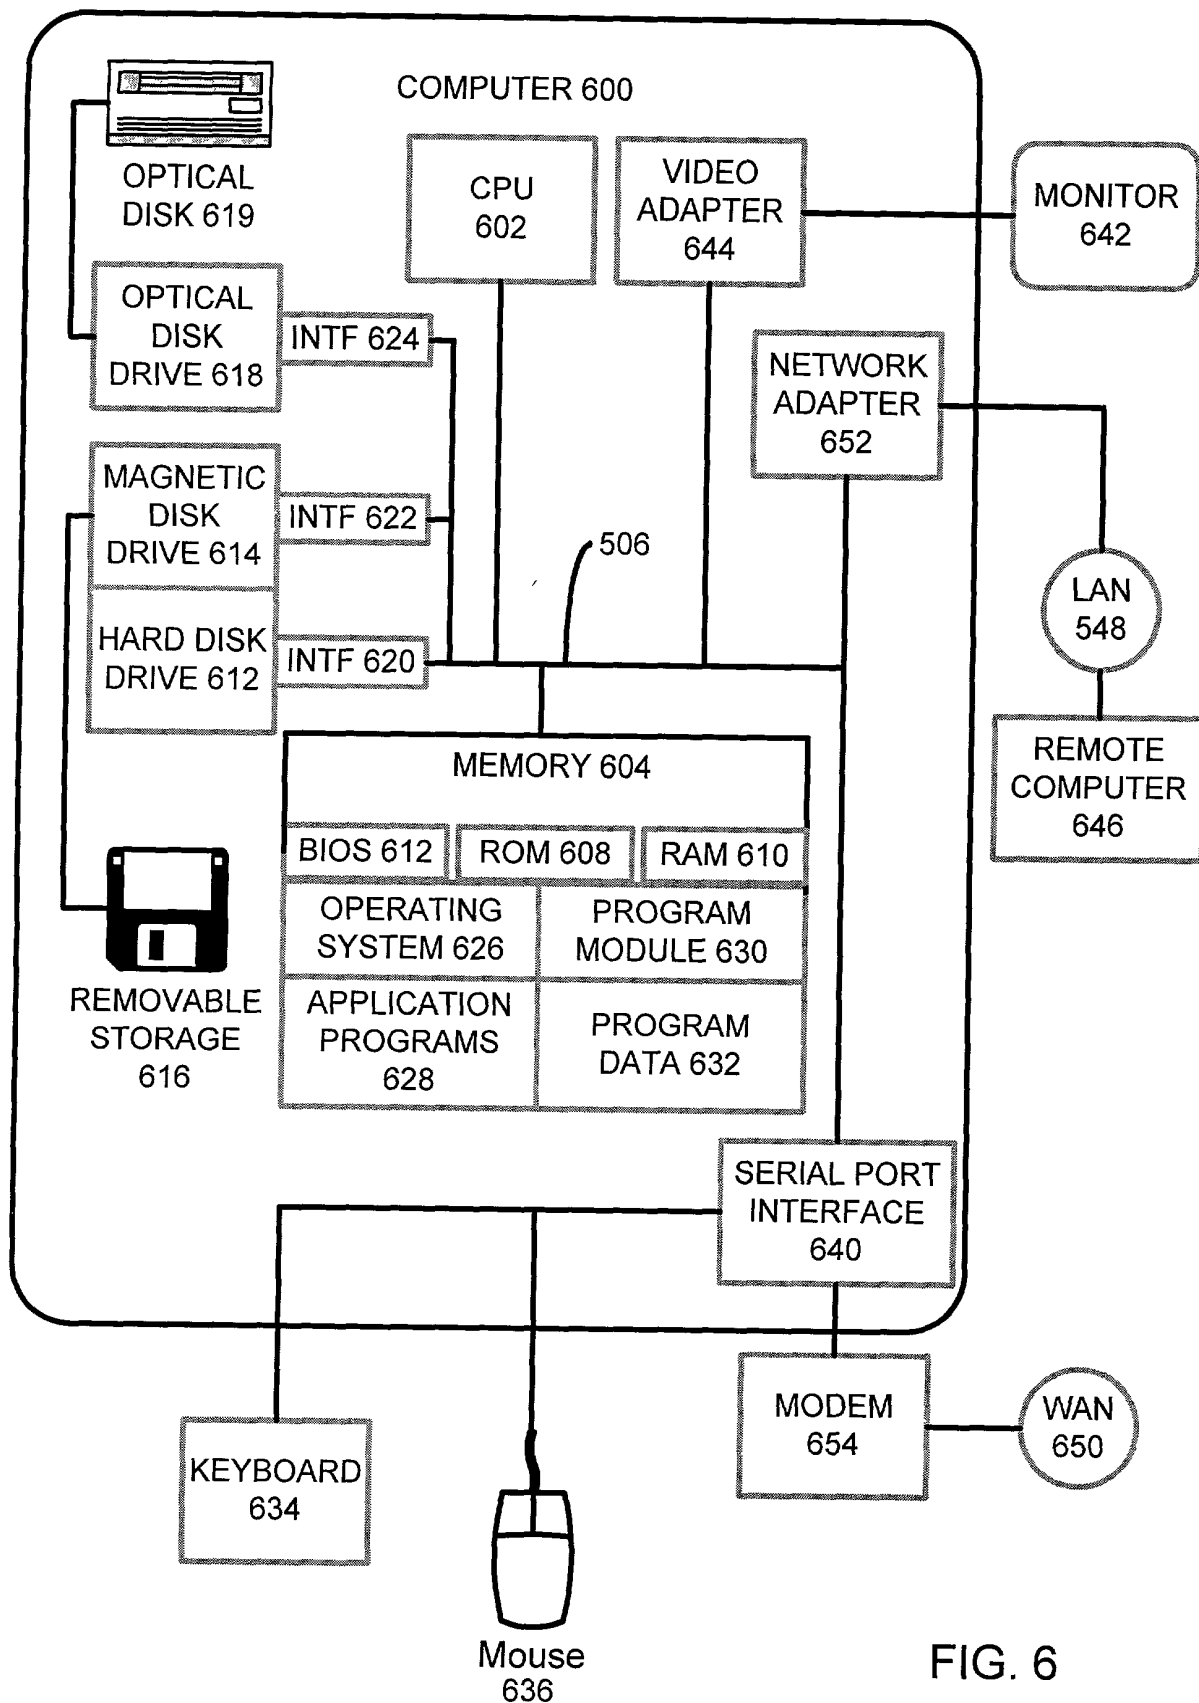


FIG. 6

FIG. 7

